



MULTIPLE OF SENSOR

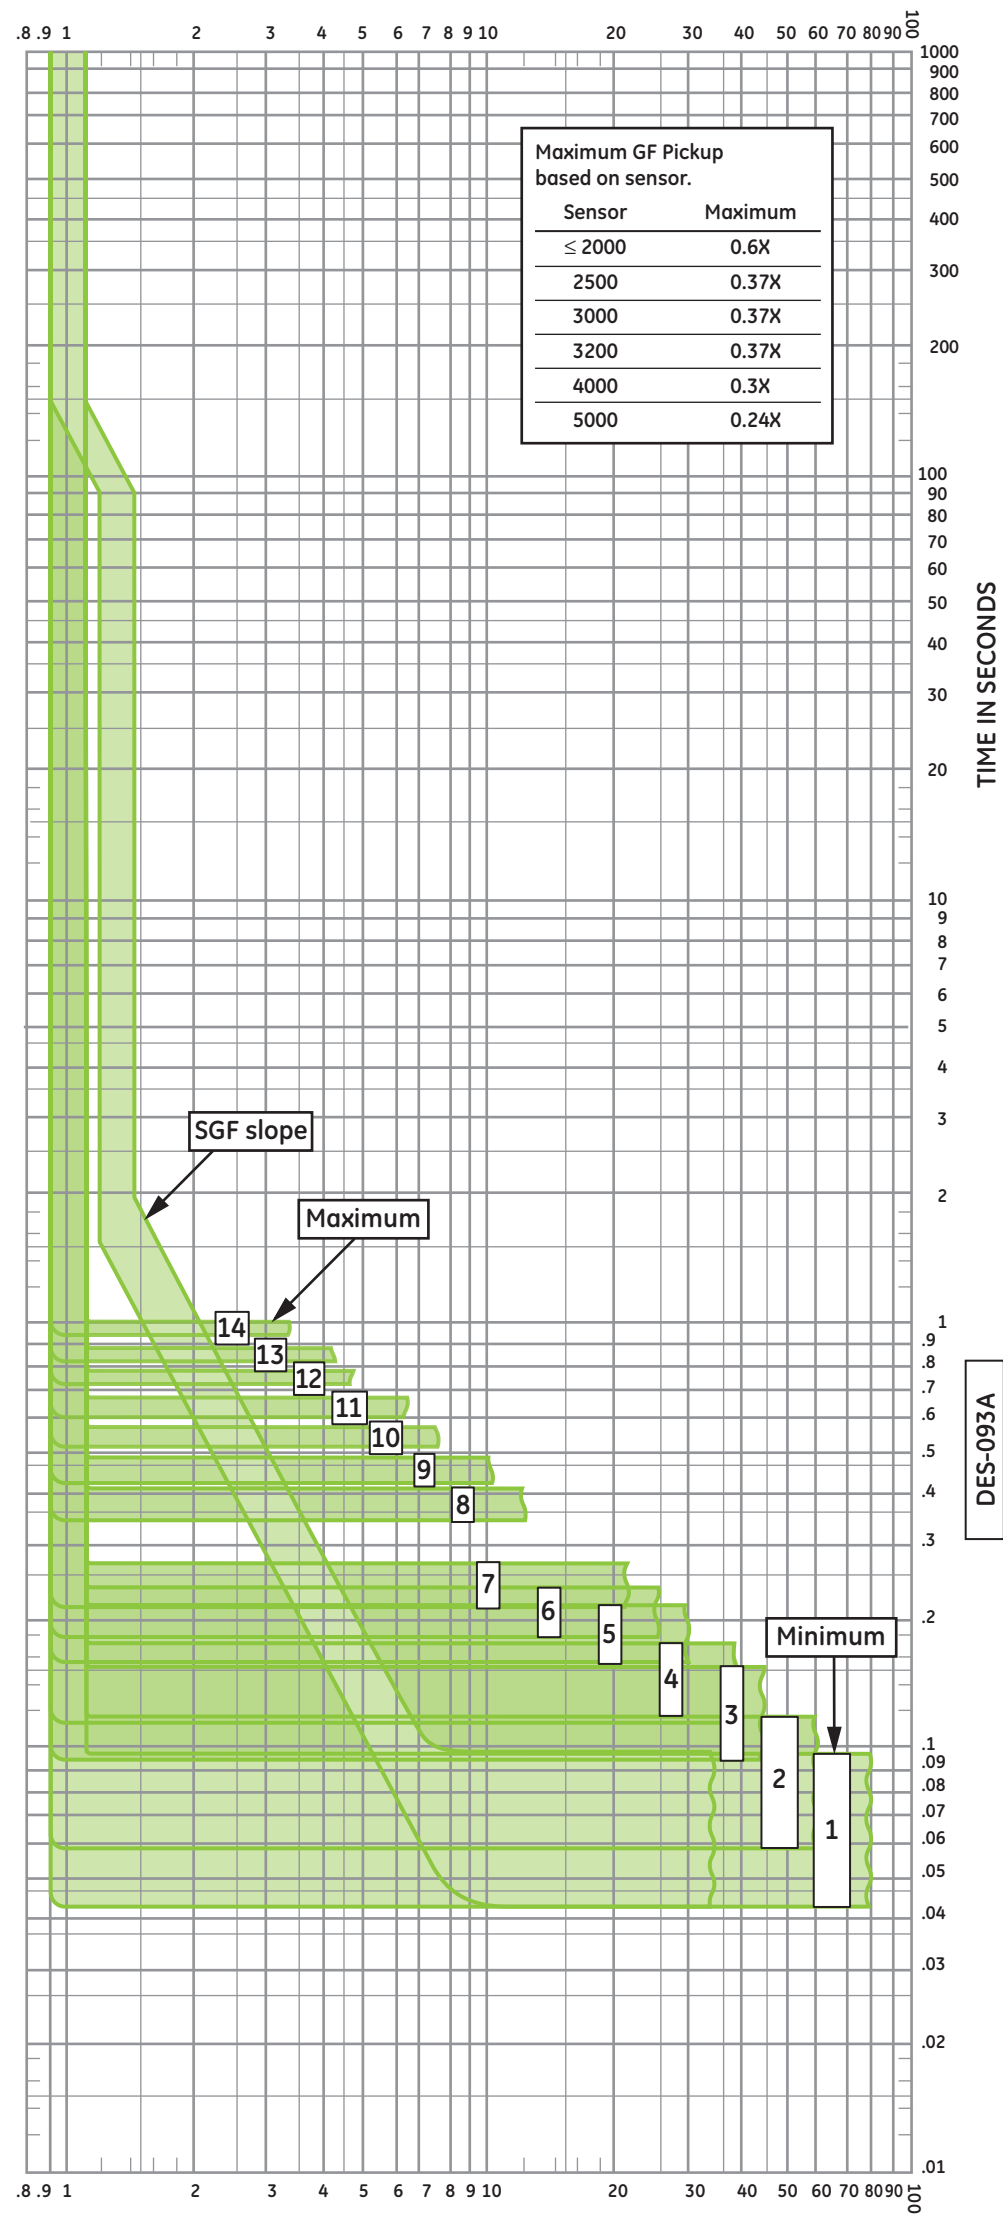

MULTIPLE OF SENSOR

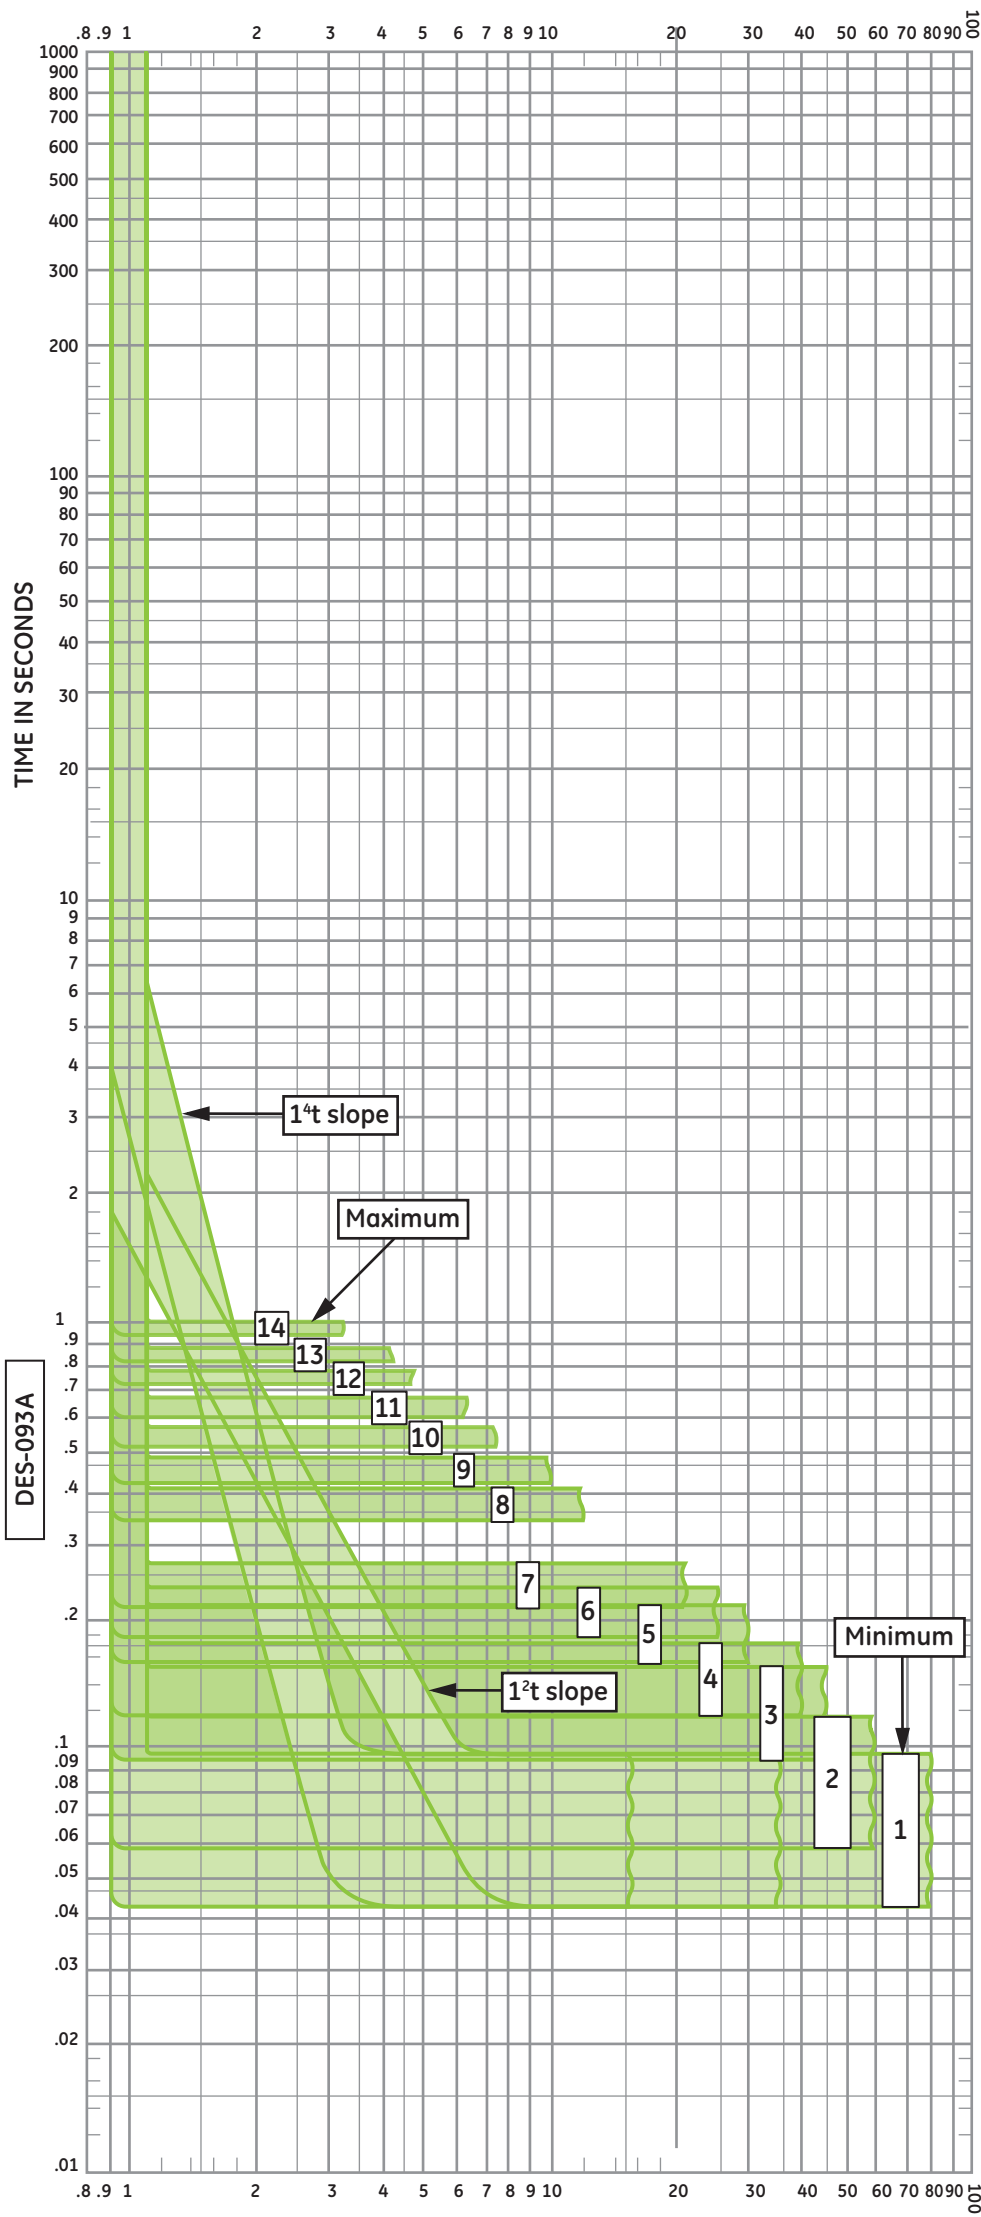

Low-Voltage Circuit Breakers

Frames 800-5000A ANSI/UL 1066 CB
 Frames 800-6000A UL 489 CB

EntelliGuard TU Trip Unit for
 EntelliGuard G Circuit Breakers
 UL489 and UL1066 Stored Energy
 Mechanism Circuit Breakers

DES-093A

Pickup Range
 Minimum 0.2X Sensor
 Maximum up to 0.6x Sensor
 Not to exceed 1200A

Ground Fault

All Voltages: 600 Vac and below

Curves apply at 60 Hertz
 and from -20°C to 55°C circuit breaker ambient temperature.