


MULTIPLES OF PLUG RATING

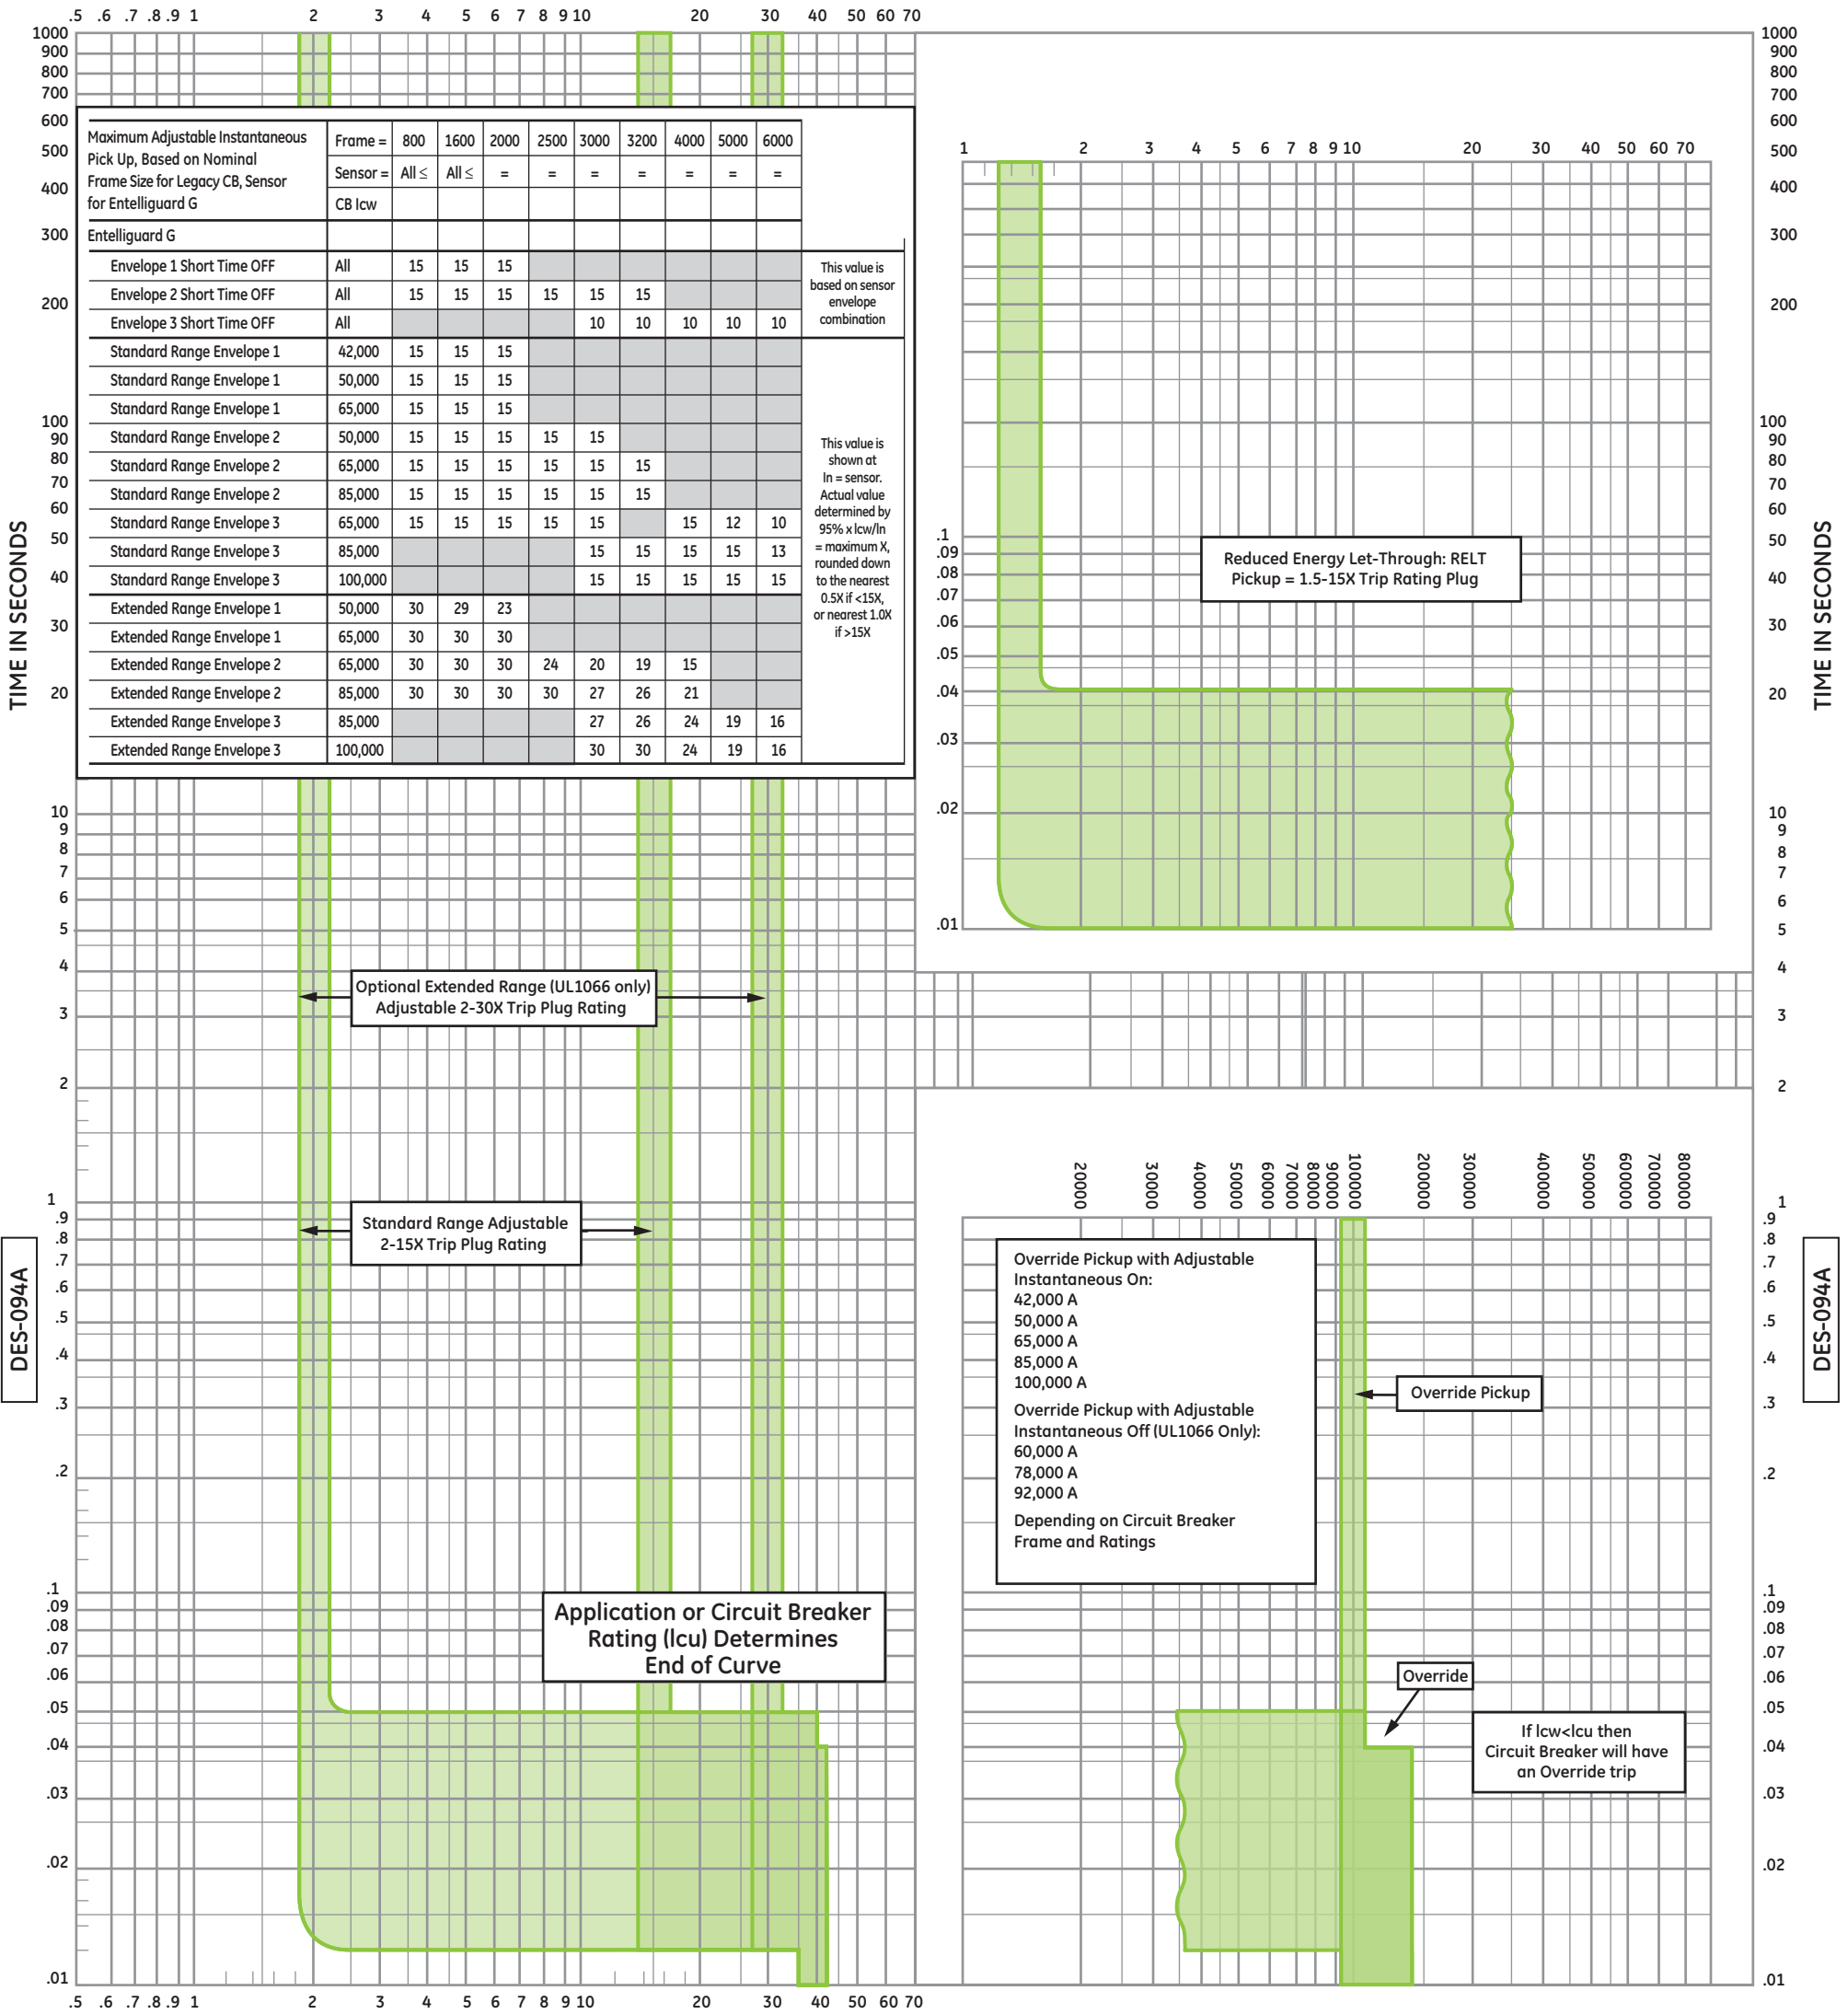

DES-094A

DES-094A

MULTIPLES OF PLUG RATING



Low-Voltage Circuit Breakers

DES-094A

Frames	800-5000A	UL1066
Frames	800-6000A	UL489
Sensors	400-6000A	

EntelliGuard TU Trip Unit for EntelliGuard G Circuit Breakers UL489 and UL1066 Stored Energy Mechanism Circuit Breakers

**Pickup Range**  
 2X-15X Trip Rating Plug Standard  
 2X-30X Trip Rating Plug Extended Range  
 Maximum Pickup may be limited by CB AIC Rating or Withstand

All Voltages: 600 Vac and below

Instantaneous, Override (HSIOC)  
 Reduced Energy Let-Through Instantaneous (RELT)

Curves apply at 60 Hertz and from -20°C to 55°C circuit breaker ambient temperature.