




MULTIPLES OF LONG TIME CURRENT SETTING PICKUP

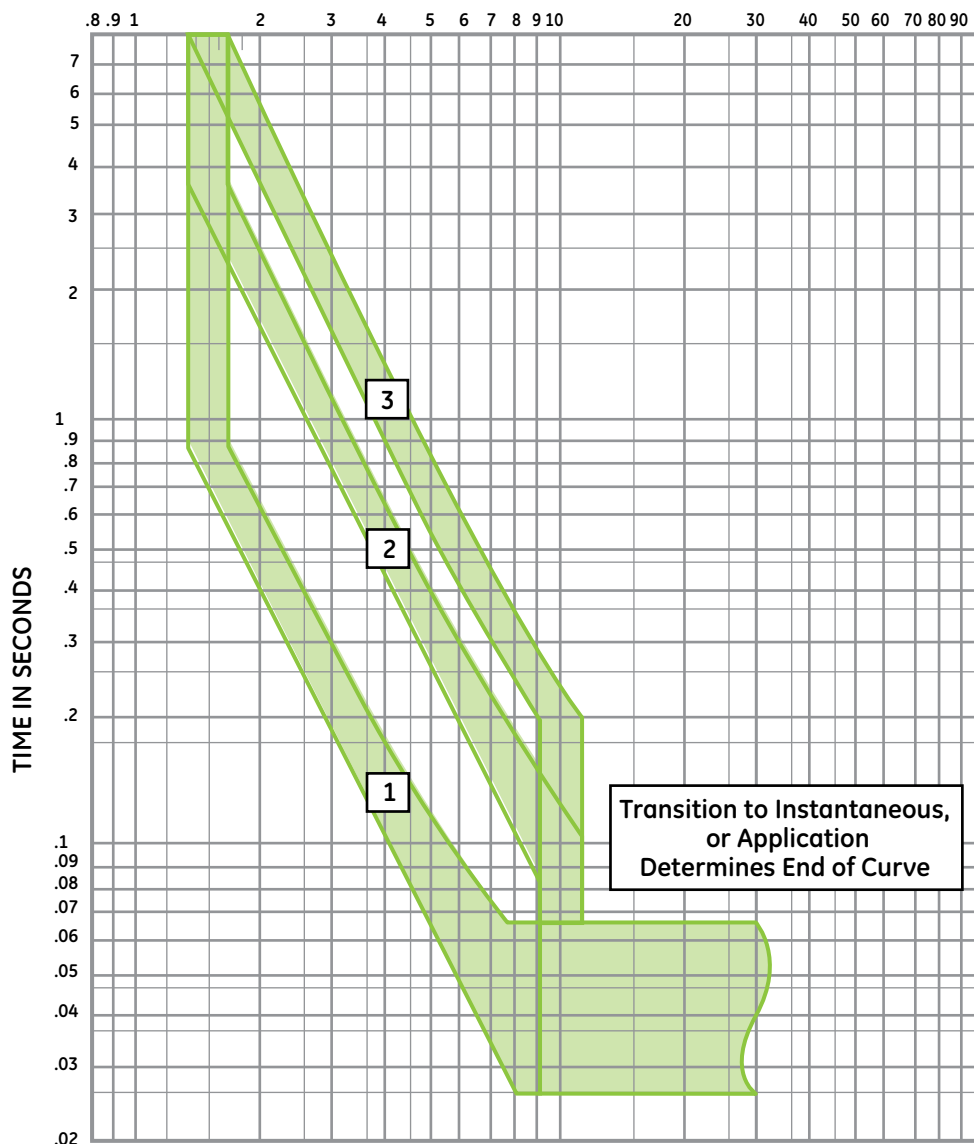


Short Time Slopes

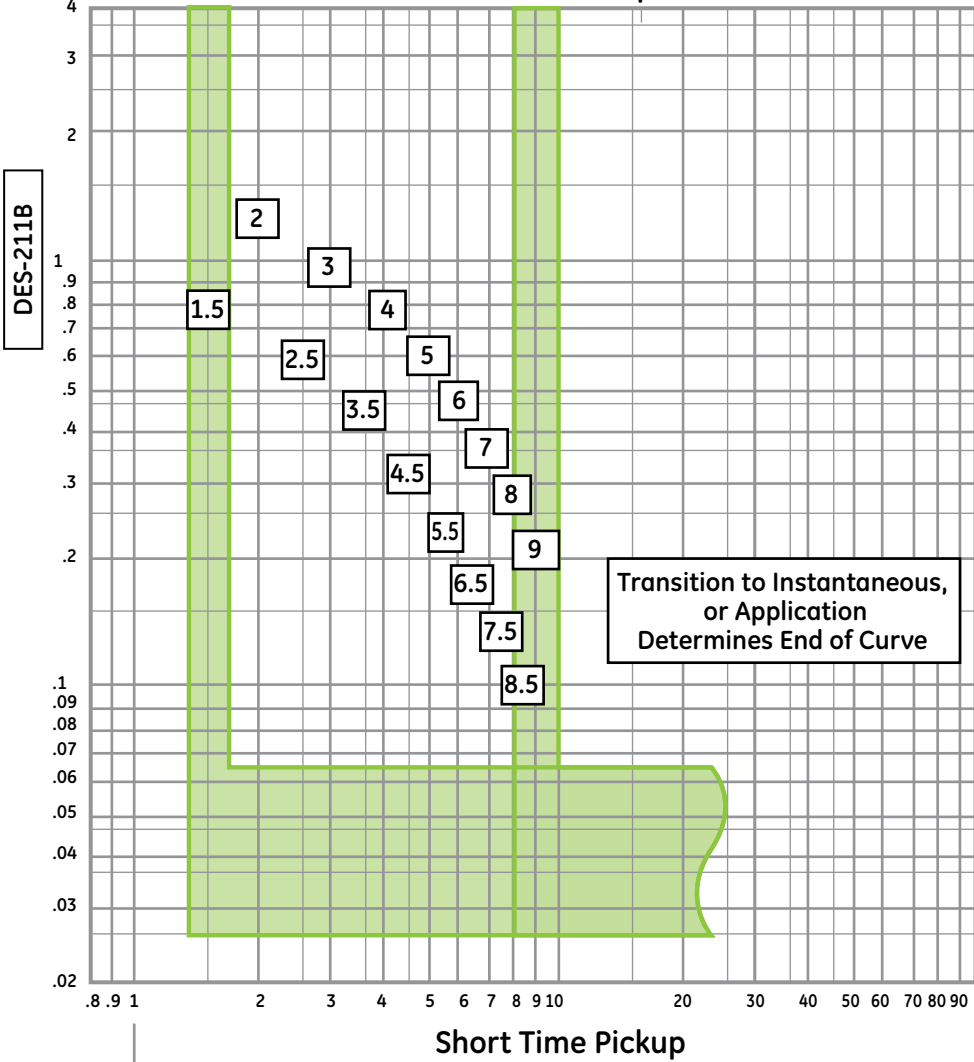

Short Time Pickup

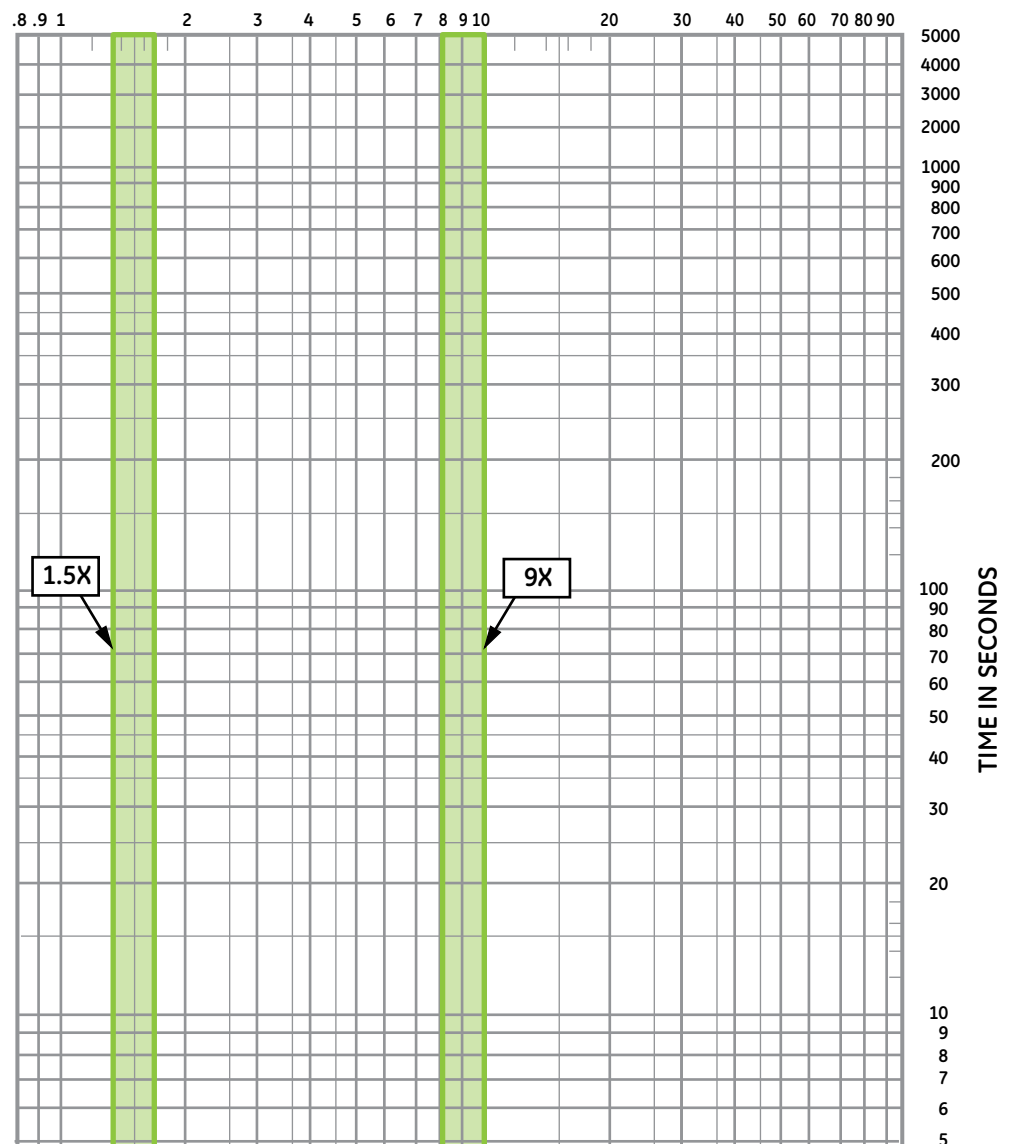

Short Time Delay

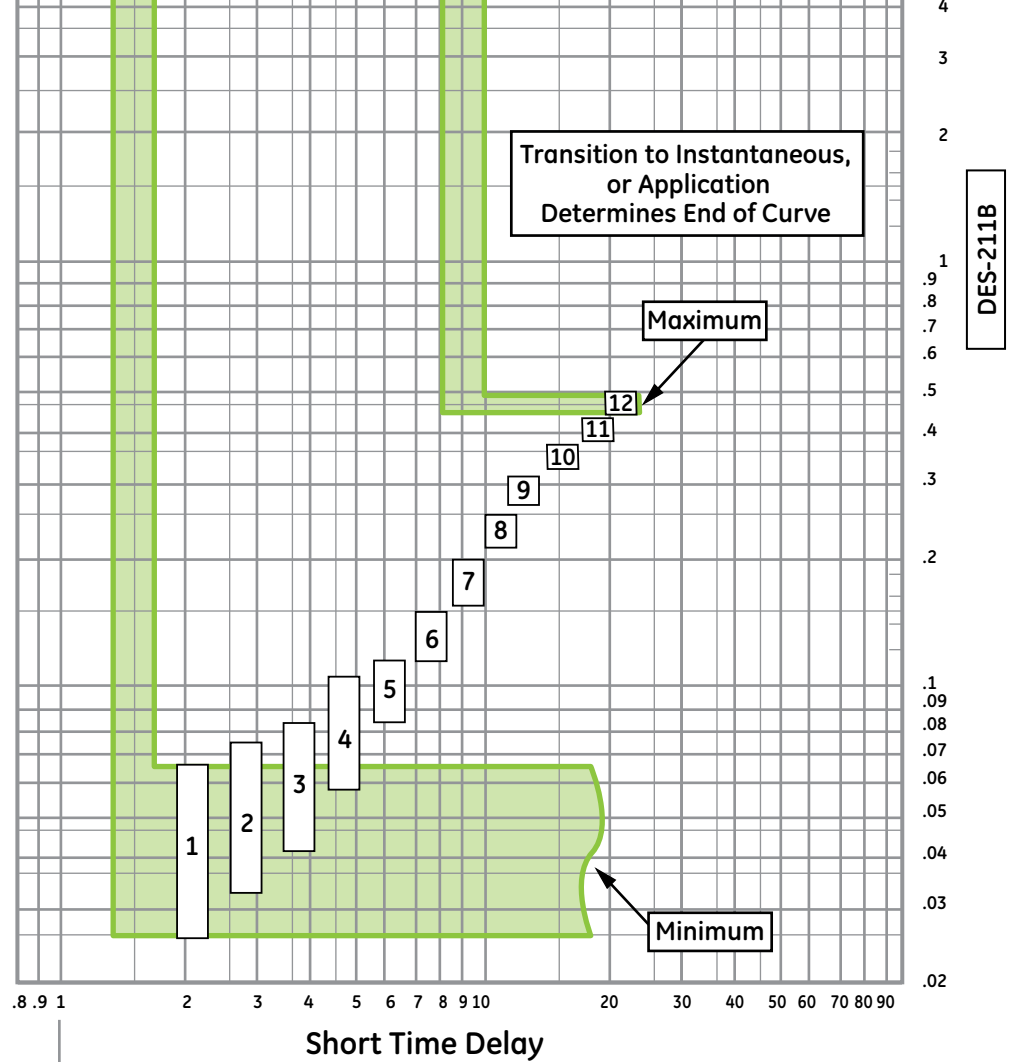

GE Energy Industrial Solutions

Available Ratings (Amperes)

Type	Model	Frame	Current Sensor (S)	Rating Plug
MCCB	SG	600	150	60, 80, 100, 125, 150
			400	150, 200, 225, 250, 300, 350, 400
			600	225, 250, 300, 350, 400, 450, 500, 600

Voltage Rating: 600Vac, 50 to 60 Hz

Notes:

- Do not use on other than 50 and 60Hz systems

Molded Case Circuit Breaker

Type SG with *micro*EntelliGuard™ Trip Unit Time Current Curves Short Time Settings

Curves apply at 50 to 60 Hertz and from -20°C to 55°C breaker ambient temperature

DES-211B

Programmer Adjustments

Short-time Function:
 Pickup Settings: 1.5 to 9.0 in increments of 0.5 multiples of current setting (C)
 Delay Bands: 1 to 12, slopes: 0 (I²t out), 1,2,3